
4' & 4'6" TURIN BED

- 1. Please read through and follow the step by step instructions in the leaflet.
- We recommend that assembly is done in the room intended for use and it is assembled by two adults.
- Please do not discard any packaging before you have checked all the parts and fittings are complete.
- 4. Assemble this product on a flat and clean surface to avoid scratching.
- Do not fully tighten all bolts until all parts have been assembled loosely. Product and/or fittings
 might be damaged by over tightening screws or bolts. Beware of cross-threading the screws and
 nuts during assembly.
- Keeps fittings away from children's reach.
- 7. Wipe clean using a soft damp cloth followed by a dry cloth.
- 8. Do not use abrasives or cleaning products which may contain ammonia or solvents.
- 9. Take care when handling or moving the furniture. Careless handling can damage wooden furniture, try to lift rather than drag

SAFETY WARNING: Do not stand on the bed base without a mattress in place.

PARTS LIST

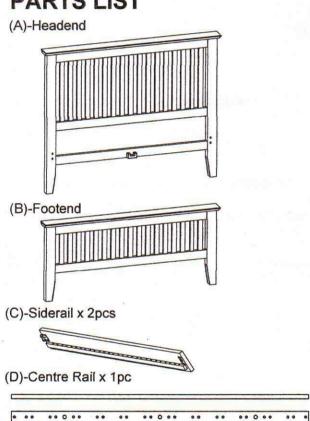

(E)-Centre Plastic Slat Holders x 13pcs




(F)-Side Plastic Slat Holders x 26pcs



(G)-Wooden Slat x 28pcs



(H)-Support Leg x 3pcs



(I)-Metal Cross Bar x 1pc

FITTINGS

1. JCBB M8 x 20mm x 8 PCS



2. M8 FLAT WASHER x 8 PCS



3. M8 SPRING WASHER x 8 PCS




4. JCBC M6 x 35mm x 5 PCS

5. CSK SCREW M4 x 32mm x 2 PCS





7. M5 ALLEN KEY x 1 PC



8. M6 x 19 FLAT WASHER x 2 PCS




9. M6 HEX NUT x 2 PCS



10. 10mm SPANNER M6 x 1 PC



Step 1: Attach the Siderails (C) to the headend (A) and Footend (B) by using JCBB M8 x 20mm (1) and M8 Spring Washer (3) and M8 Flat Washer (2) tighten using M5 Allen Key (7).

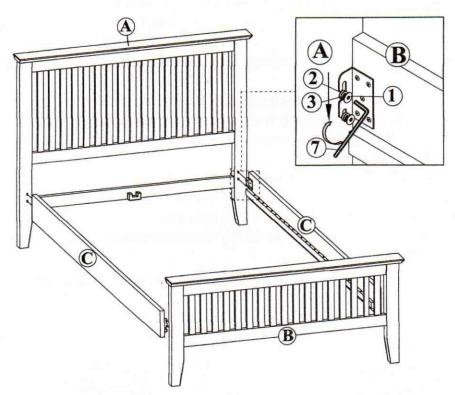

Step 2: Fix the Support Legs (H) 2pcs to the Centre Rail (D) and secure in place with JCBC M6 x 35mm (4). Tighten using Allen Key M4 (6).


Fix the Centre Rail (D), Support Legs (H) to the Headend (A) and Footend (B)

with JCBC M6 x 35mm (4) ,M6 Hex Nut (9),M6 Flat Washer (8).

Tighten using Allen Key M4 (6) & Spanner (10).


Fix the Support Legs (H) 1pc to the Metal Cross Bar (I) and Center Rail (D) secure in place with JCBC M6 x 35mm (4). Tighten using Allen Key M4 (6).

Fix the Metal Cross Bar (I), to the Side Rail L & R (C) with CSK Screw M4 x 32mm (5)

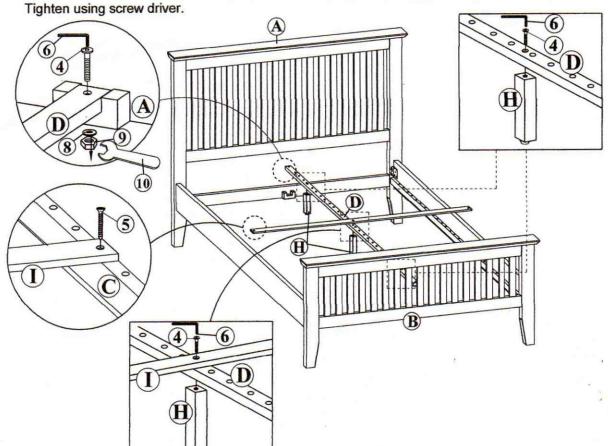

PAGE 2 of 3

Step 3: Insert the Wooden Slat (G) into the Plastic Slat Holders(E) (F)

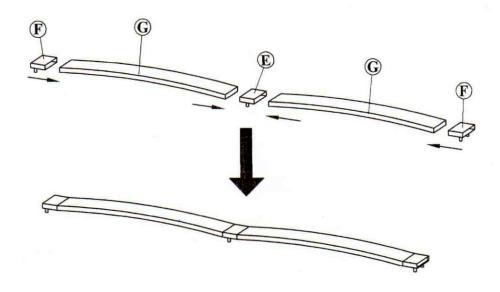

Step 4 : Align the pins on the Plastic Slat Holders (E) (F) to the holes along the Centre Rail (D) and the Siderails (C). Gently tap them into the holes. Tap the corners of the Plastic Slat Holders (E) (F) to knock them into place with rubber mallet. (NOT provided)

